


5052: Front Panel

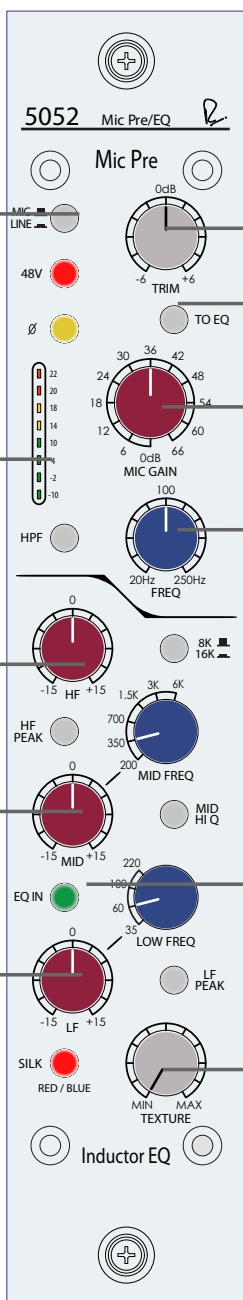

Mic / Line

Selects between mic and line inputs

Trim

Continuously variable +/- 6dB trim control

To EQ

Sends the Mic Pre signal directly to the EQ

Mic Gain

66dB of gain in 6dB steps

Level Meters

8 segment LED Meter for monitoring output level

HPF

Continuously variable HPF from 20-250Hz at 12dB / Octave

High Frequency Shelf / Peak

Selectable at 8 and 16 KHz. With continuous gain from -15 to +15dB. Selectable peak or shelf curves

Mid Parametric

Selectable at 200, 350, 700, 1.5 K, 3 K, and 6 KHz. With continuous gain from -15 to +15dB. Selectable Hi Q.

EQ In

Engages the 3-band EQ

Low Frequency EQ

Selectable at 35, 60, 100, and 220 Hz. Continuous gain from -15 to +15dB Selectable peak or shelf curves.

Texture

Continuously variable control for Silk Red & Blue. At max setting and levels THD is 4-5% (mostly 2nd order)